


# ULTRA

Compressor

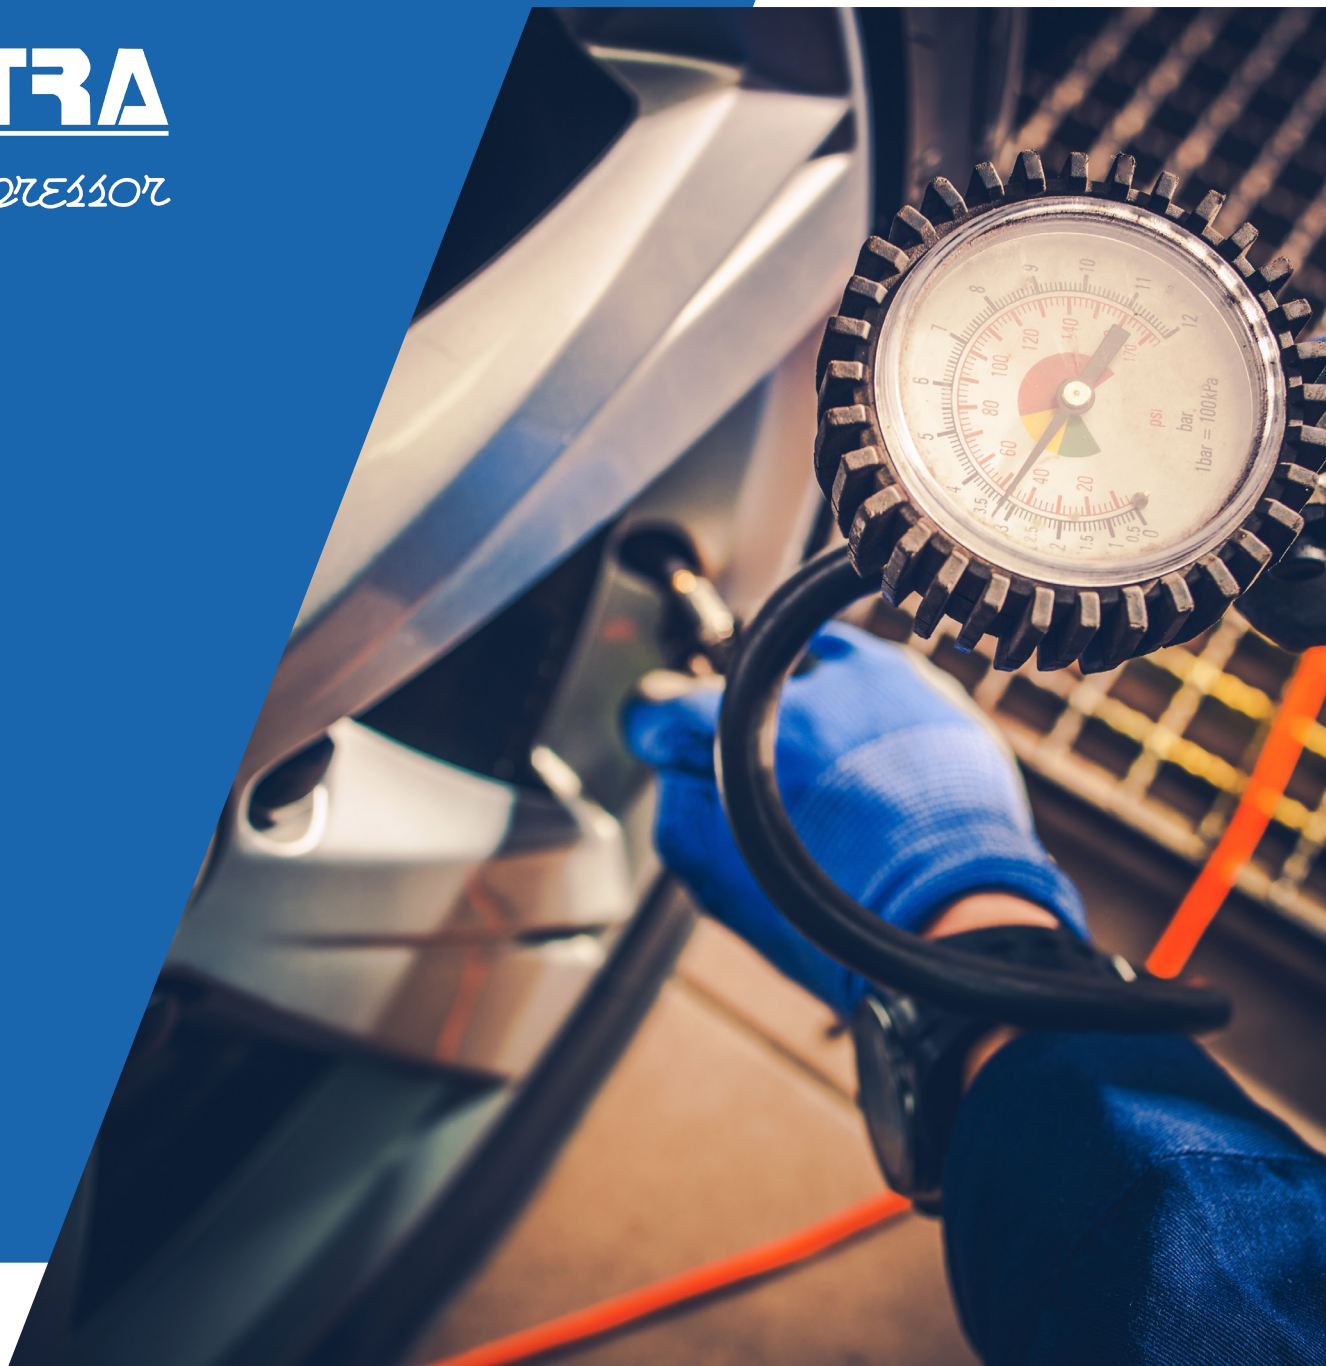

## SINGLE AND TWO-STAGE

Industrial Reciprocating  
Air Compressor



ULTRACOMPRESSOR

## Advantages of Air Cooled Piston Air Compressors


1. Less compression ratio, higher efficiency, more power saving.
2. The main parts are produced by advanced numerical control processing equipment with high accuracy and high reliability.
3. Compressor has the advantages of simple and compact structure, low oil consumption, low noise, stable operation, good performance and long service life.
4. The efficient intermediate cooling buffer improves the compressor efficiency, reduces the power consumption, reduces the discharge temperature and prolongs the service life.



ISO9001 : 2008



ISO14001 : 2015

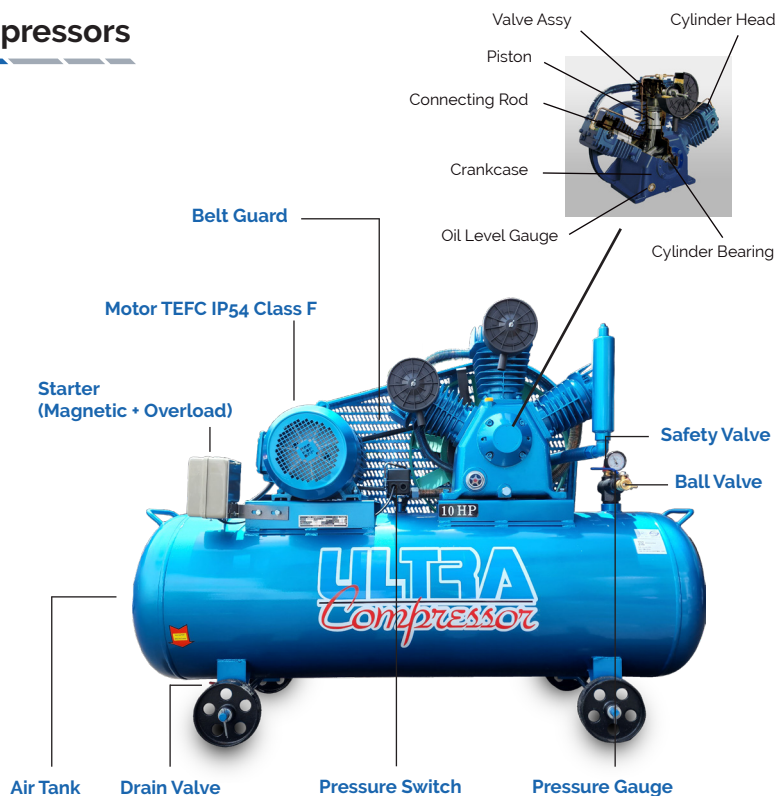

### Belt-Drive Single Stage (Max Pressure 10 bar)

| Model  | Motor | Power         | Capacity | Pressure | No. Piston | Speed    | Tank | Dimension    |
|--------|-------|---------------|----------|----------|------------|----------|------|--------------|
|        | (Hp.) | (V/Ph)        | (L/min)  | (bar)    |            | (R.P.M.) | (L.) | (CM.)        |
| VA-55  | 1     | 220-1         | 205      | 8 / 10   | 2          | 635      | 90   | Ø 350 x 980  |
| VA-65  | 2     | 220-1         | 310      | 8 / 10   | 2          | 635      | 150  | Ø 400 x 1000 |
| VA-80A | 3     | 220-1 / 380-3 | 560      | 8 / 10   | 2          | 770      | 165  | Ø 400 x 1130 |
| VA-80B | 3     | 220-1 / 380-3 | 560      | 8 / 10   | 2          | 770      | 260  | Ø 500 x 1130 |
| TA-80A | 5.5   | 380-3         | 900      | 8 / 10   | 3          | 900      | 260  | Ø 500 x 1130 |
| TA-80B | 5.5   | 380-3         | 900      | 8 / 10   | 3          | 900      | 315  | Ø 500 x 1400 |
| VA-100 | 7.5   | 380-3         | 1290     | 8 / 10   | 2          | 970      | 315  | Ø 500 x 1400 |
| TA-100 | 10    | 380-3         | 1790     | 8 / 10   | 3          | 860      | 315  | Ø 500 x 1400 |
| TA-120 | 15    | 380-3         | 2850     | 8 / 10   | 3          | 860      | 520  | Ø 600 x 1510 |
| 4V-120 | 20    | 380-3         | 3160     | 8 / 10   | 4          | 800      | 520  | Ø 600 x 1510 |

### Belt-Drive Two Stage (Max Pressure 15 bar)

| Model   | Motor | Power  | Capacity | Pressure | No. Piston | Speed    | Tank | Dimension    |
|---------|-------|--------|----------|----------|------------|----------|------|--------------|
|         | (Hp.) | (V/Ph) | (L/min)  | (bar)    |            | (R.P.M.) | (L.) | (CM.)        |
| HTA-65  | 3     | 380-3  | 350      | 12 / 15  | 3          | 990      | 165  | Ø 400 x 1130 |
| HTA-80  | 5.5   | 380-3  | 655      | 12 / 15  | 3          | 950      | 260  | Ø 500 x 1130 |
| HVA-100 | 7.5   | 380-3  | 825      | 12 / 15  | 2          | 800      | 315  | Ø 500 x 1400 |
| HTA-100 | 10    | 380-3  | 1255     | 12 / 15  | 3          | 990      | 315  | Ø 500 x 1400 |
| HTA-120 | 15    | 380-3  | 1820     | 12 / 15  | 3          | 860      | 520  | Ø 600 x 1510 |

### Oil Free Piston Compressor (100% completely Oil-Free)

| Model  | Motor     | Power  | Capacity | Pressure | No. Piston | Speed    | Tank | Dimension          |
|--------|-----------|--------|----------|----------|------------|----------|------|--------------------|
|        | (Hp.)     | (V/Ph) | (L/min)  | (bar)    |            | (R.P.M.) | (L.) | (CM.)              |
| OL-80  | 5.5       | 380-3  | 800      | 7        | 3          | 900      | 315  | Ø 500 x 1400       |
| OL-90  | 7.5       | 380-3  | 950      | 7        | 3          | 800      | 315  | Ø 500 x 1400       |
| OL-100 | 10        | 380-3  | 1450     | 7        | 3          | 860      | 315  | Ø 500 x 1400       |
| OL-150 | 15(7.5x2) | 380-3  | 1900     | 7        | 3 x 2      | 800      | 500  | 1320 x 1250 x 1200 |
| OL-200 | 20 (10x2) | 380-3  | 2900     | 7        | 3 x 2      | 860      | 500  | 1300 x 1300 x 1200 |